


For Pyramid Diffusers Up To 47-3/4" x 47-3/4"

1. Using the 5" L-Clips as a template, drill 1/8" holes for the top brackets down through the gel coat side of the top lip of the diffuser. Position the clip 1" in from the corner on each side of the diffuser. Make sure that the L-clip is flush with the outer edge of the diffuser. See Diagram.
2. Using the 5" L-Clip as a template, drill 1/8" holes for the lower bracket by centering it on the bottom lip of the diffuser. Position the L-clip 1/16" in from the outer edge of the diffuser to allow for the thickness of the Hook & Loop, and drill up through the gel coat side of the bottom lip of the diffuser.
3. Install the L-Clips at the top and bottom of the diffuser with either 1/8" white headed pop rivets or self-tapping screws. The pop rivets will be less noticeable and more flush with the top edge of the diffuser.
4. Mount the 5" wall bracket to the wall using the appropriate fasteners to secure the brackets to the surface. The top of the wall bracket should be located 3/16" below the desired height of the diffuser. Allow a 1" minimum vertical engagement clearance between the top of the diffuser and the ceiling.

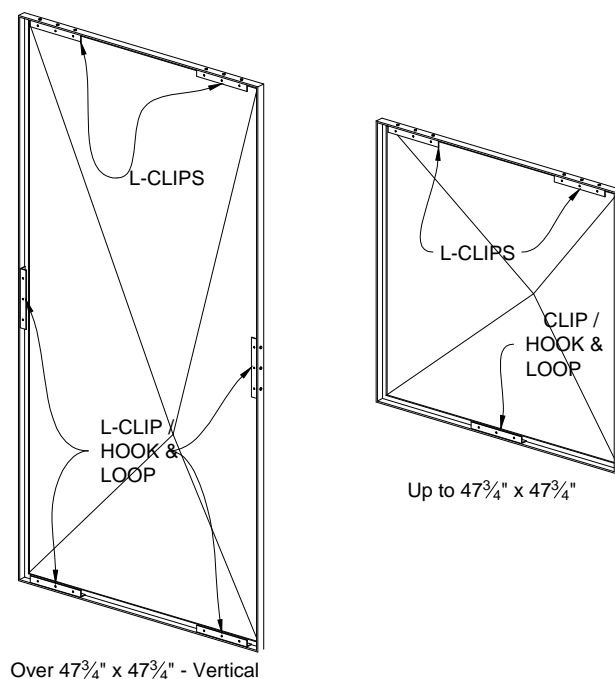

5. Peel off the back of the Hook & Loop to expose the adhesive. Press the diffuser to the wall above the wall brackets and slide the diffuser onto the wall brackets while holding the bottom of the diffuser slightly away from the wall. With the L-Clips engaged, level and adjust the position. Once the desired position is achieved, press the bottom of the diffuser firmly to the wall to adhere the hook & loop.

For Pyramid Diffusers over 47-3/4"

6. For horizontally hung diffusers that are greater than 47-3/4", there will be one additional L-clip to be centered and installed on the top edge as per step 1.
7. For horizontally hung diffusers that are greater than 47-3/4", there will be two additional Hook & Loop L-Clips to be installed 1" in from each bottom edge as per step 2. Then follow steps 3-5.
8. For vertically hung diffusers that are greater than 47-3/4", in addition to installing the top L-clips in step 1, there will be two additional Hook & Loop L-Clips centered on each vertical edge and recessed 1/16" from the outer edge. Using the 5" L-Clip as a template, drill 1/8" holes for the side brackets by centering it on the vertical edge of the diffuser. Position the L-clip 1/16" in from the outer edge of the diffuser and drill in through the gel coat side of the bottom lip of the diffuser.
9. For vertically hung diffusers that are greater than 47-3/4", there will be one additional Hook & Loop L-Clip provided. Mount each L-Clip 1" in from the corner of each side of the diffuser. Using the 5" L-Clip as a template, drill 1/8" holes for the lower bracket through the bottom lip of the diffuser. Position the L-clip 1/16" in from the outer edge of the diffuser and drill up through the gel coat side of the bottom lip of the diffuser. Then follow steps 3-5.

